


Profilati metallici

Travi HEA ad ali larghe parallele - serie alleggerita UNI 5397-78

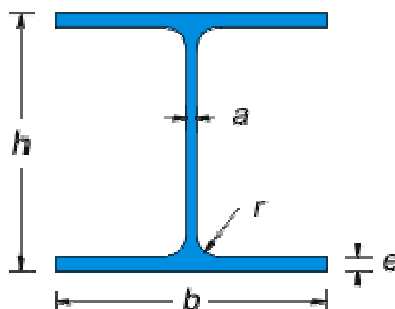

sigla HEA	b mm	h mm	a mm	e mm	r mm	Peso kg/m	Sezione cm ²	Momenti di inerzia		Moduli di resistenza		Raggi di inerzia	
								Jx cm ⁴	Jy cm ⁴	Wx cm ³	Wy cm ³	ix cm	iy cm
100	100	96	5,0	8,0	12	16,7	21,24	349,2	133,8	72,76	26,76	4,06	2,51
120	120	114	5,0	8,0	12	19,9	25,34	606,2	230,9	106,3	38,48	4,89	3,02
140	140	133	5,5	8,5	12	24,7	31,42	1.033	389,3	155,4	55,62	5,73	3,52
160	160	152	6,0	9,0	15	30,4	38,77	1.673	615,6	220,1	76,95	6,57	3,98
180	180	171	6,0	9,5	15	35,5	45,25	2.510	924,6	293,6	102,7	7,45	4,52
200	200	190	6,5	10,0	18	42,3	53,83	3.692	1.326	388,6	133,6	8,28	4,98
220	220	210	7,0	11,0	18	50,5	64,34	5.410	1.955	515,2	177,7	9,17	5,51
240	240	230	7,5	12,0	21	60,3	76,84	7.763	2.769	675,1	230,7	10,05	6,00
260	260	250	7,5	12,5	24	68,2	86,82	10.450	3.668	836,4	282,1	10,97	6,50
280	280	270	8,0	13,0	24	76,4	97,26	13.670	4.763	1.013	340,2	11,86	7,00
300	300	290	8,5	14,0	27	88,3	112,5	18.260	6.310	1.260	420,6	12,74	7,49
320	300	310	9,0	15,5	27	97,6	124,4	22.930	6.985	1.479	465,7	13,58	7,49
340	300	330	9,5	16,5	27	105,0	133,5	27.690	7.436	1.678	495,7	14,40	7,46
360	300	350	10,0	17,5	27	112,0	142,8	33.090	7.887	1.891	525,8	15,22	7,43
400	300	390	11,0	19,0	27	125,0	159,0	45.070	8.564	2.311	570,9	16,84	7,34
450	300	440	11,5	21,0	27	140,0	178,0	63.720	9.465	2.896	631,0	18,92	7,29
500	300	490	12,0	23,0	27	155,0	197,5	86.970	10.370	3.550	691,1	21,98	7,24
550	300	540	12,5	24,0	27	166,0	211,8	111.900	10.820	4.146	721,3	22,99	7,15
600	300	590	13,0	25,0	27	178,0	226,5	141.200	11.270	4.787	751,4	24,97	7,05
650	300	640	13,5	26,0	27	190,0	241,6	175.200	11.720	5.474	781,6	26,93	6,97
700	300	690	14,5	27,0	27	204,0	260,5	215.300	12.180	6.241	811,9	28,87	6,84
800	300	790	15,0	28,0	30	224,0	285,8	303.400	12.640	7.682	842,6	32,58	6,65
900	300	890	16,0	30,0	30	252,0	320,5	422.100	13.550	9.485	903,2	36,29	6,50
1000	300	990	16,5	31,0	30	272,0	346,8	553.800	14.000	11.190	933,6	39,96	6,35